

warmup[®]
Est. 1994

Underfloor heating | Tiled shower solutions



Non-Programmable Thermostat

W3MTC-1991-WU & W3MTC-1999UCH

Non-Programmable Thermostat

W3MTC-1991-WU (Floor sensing) & W3MTC-1999UCH(Air sensing)

This is a simple ON/OFF thermostat giving reliable service to those who want the most straightforward kind of control. This electronic heating thermostat is designed to be flush mounted in a standard wall socket. Users know exactly what they get at all times - they simply set the desired temperature on the knob and switch the heating on or off.

Features include

Model W3MTC-1991-WU has a **remote floor sensor** which is designed to meet the standard requirements for comfort, safety and energy saving

Locking mechanism behind the control knob to limit the amount of adjustment possible.

Model W3MTC-1999UCH has an air sensor.





The perfect solution for budget-conscious users.



Model MTC

Specifications

TEMPERATURE CONTROL	SWITCHING ACTION	DIMENSIONS(H/W/D)
On/Off Temperature settings 10 to 50°C	230-240 V 16 Amps ~ 50 Hz	115 x 84 x 52mm Fits over standard vertical flush box

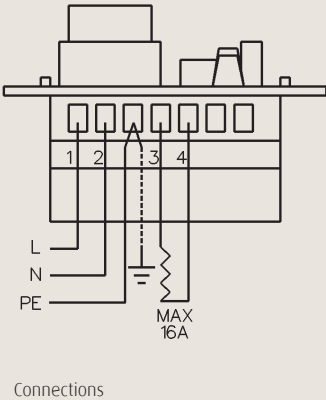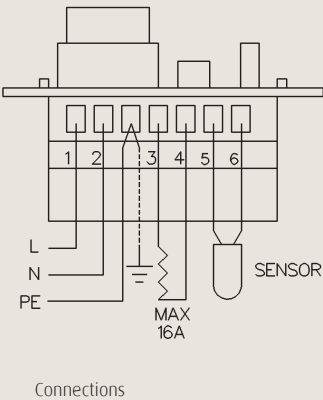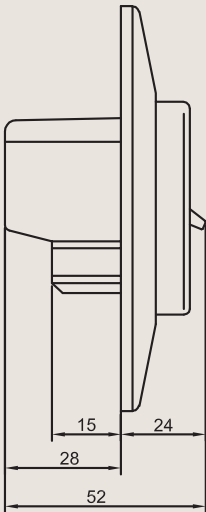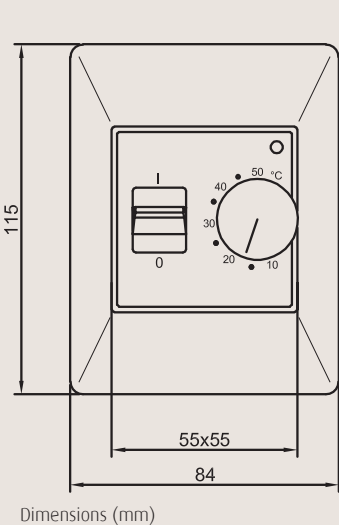

Technical Data

Supply voltage	240 V AC ±10 % 50/60 Hz
Maximum load	16A
Built-in interrupter	2 pole
Temperature range	10°C to 50 °C
On/Off differential	0.4 °C
Housing	IP20
Ambient temperature	0°C to 50 °C
Dimensions (H/W/D)	115/84/52mm

Warmup has heating experts and contractors nationwide, who will be pleased to provide more details on Warmup’s products and services. To contact your local Warmup distributor or to arrange a free, no-obligation quotation, please call 0800 WARMUP (927 687)